

# MODELLING ANAEROBIC DIGESTION DURING TEMPERATURE AND LOAD VARIATIONS

W.H. BERGLAND & R. BAKKE

Department of Process, Energy and Environmental Technology,  
University College of Southeast Norway, Norway.

## ABSTRACT

Experimental results and simulations based on the Anaerobic Digestion Model No.1 (ADM1) with temperature effects on kinetics were used to evaluate rate limiting steps in sludge bed anaerobic digestion (AD) during load and temperature variations. Simulations were carried out in Aquasim. The model is compared to data from a pilot experiment in a 220 liter AD sludge bed reactor treating dairy manure for 16 months of various loads; 0–13 kg COD L<sup>-1</sup> d<sup>-1</sup> and various temperatures; 25°C, 30°C and 35°C. Methane and CO<sub>2</sub> production were monitored on-line while soluble and particulate organic carbon, pH and volatile fatty acids were measured on regularly collected inlet and effluent samples. Simulated overall soluble and particulate organic carbon removal, methane and CO<sub>2</sub> production, pH and acetate are close to measured values while propionate is underestimated during some transitions. The fit is mainly sensitive to the composition of the feed in terms of relative amounts of lipids, proteins and carbohydrates especially at simultaneously high load and low temperature. During such conditions, the model predicts accumulation of long chained fatty acids (LCFA), suggesting that the degradation of LCFA is the rate-limiting step at low temperatures. This effect is not explained by reduced LCFA solubility at lower temperature. The model predicts that sludge bed AD efficiency on substrates with little or no LCFA is independent of temperature between 25°C and 35°C while LCFA degradation is favoured by higher temperature.

*Keywords: ADM1, anaerobic digestion, rate limiting, sludge bed, temperature dependence.*

## 1 INTRODUCTION

Anaerobic digestion (AD) to recover energy as methane from organic wastes can reduce greenhouse gas emissions and contribute to more sustainable waste handling.

The Anaerobic Digestion Model No.1 (ADM1) [1] is a common platform of modelling, simulations and understanding AD, developed by the International Water Association (IWA). ADM1 was developed primarily to model digestion of sludge from wastewater treatment plants at standard process temperatures 35°C and 55°C, presumed optimal for respectively meso- and thermophilic digestion.

Process heating can consume a large portion of the potential energy of organic wastes, especially in AD of low energy substrates, such as cow manure slurry. Implications of AD at T<35°C to reduce heat losses is therefore studied. ADM1 included temperature effects on kinetic coefficients for the biochemical processes particle disintegration, hydrolysis and substrate uptake reactions (ADM1-T) were developed for this purpose [2]. This model combined with pilot tests is used here to examine temperature effects during a wide range of loadings.

Intermediate products are measured to identify rate limiting degradation steps since it is not always obvious what is the rate-limiting step. Disintegration, hydrolysis, propionate degradation and acetoclastic methanogenesis are often considered to be possible rate limiting processes, depending on the feed composition. LCFA degradation may also be the rate limiting since it is slower than degradation of amino acids and sucrose. Hydrolysis and disintegration are often assumed rate limiting for particle rich substrates, such as manure, but this may be altered by pre-treatment. Particle rich manure filtrate, for which the rate-limiting step is unknown, is used as feed in this study.

Other physio-chemical properties like solubility that may change when temperature change are also evaluated. The composition of the feed varies due to different feeding regimes for the cows during the year and effects of this is examined.

The model is compared to data from a 220 liter AD sludge bed reactor treating dairy manure filtrate for 16 months of various loads; 0–13 kg COD L<sup>-1</sup> d<sup>-1</sup> with step temperature changes between 25°C, 30°C and 35°C.

The main goal is to evaluate how well ADM1-T handles temperature effects in sludge bed AD in the upper mesophilic range by studying how the model deviates from real behaviour at three temperatures, temperature transitions and varying load. Additional aims are: (1) Evaluate temperature effects on reactions in sludge bed AD; (2) Look for limiting reaction steps for process capacity and; (3) Evaluate effect of manure feed content variations.

## 2 MATERIALS AND METHODS

An ADM1-T model using temperature-dependent kinetic parameters for both biochemical degradation steps and physico-chemical processes is compared against continuous AD using dairy manure filtrate at various HRT and temperatures. The sludge retention time, SRT, is modelled using the original suggested method in ADM1, but an alternative method is also evaluated. The composition of the feed (lipids, protein and carbohydrates) together with the biodegradability of both the liquid fraction (COD<sub>S</sub>) and solid fraction (COD<sub>T</sub>-COD<sub>S</sub>) is varied. Simulations were carried out in Aquasim.

### 2.1 Model parameters

#### 2.1.1 Temperature adjusted parameters in ADM1-T

The kinetic temperature dependent parameters,  $K_{dis}$ ,  $K_{hyd}$  and  $k_m$ , for biochemical processes in ADM1-T [2] were varied with temperature in stepwise changes at 25°C, 30°C and 30°C.

$K_{dis}$  and  $K_{hyd}$  are the temperature dependent kinetic parameters for the 1st order extracellular reactions disintegration and hydrolysis (1).

$$\rho = K_{dis} \cdot X_{dis} \quad \text{and} \quad \rho = K_{hyd} \cdot X_{hyd} \quad (1)$$

$\rho$  = disintegration rate or hydrolysis rate of solid substrate (kg COD solid substrate m<sup>-3</sup> d<sup>-1</sup> where COD = chemical oxygen demand),  $X_{dis}$  and  $X_{hyd}$  = solid substrate concentration that is disintegrated or hydrolysed (kg COD solid substrate m<sup>-3</sup>),  $K_{dis}$  and  $K_{hyd}$  = temperature dependent kinetic parameter for disintegration or hydrolysis (d<sup>-1</sup>).

Disintegration is typically considered the rate-limiting step for substrates containing mainly particles, while hydrolysis of proteins, lipids and carbohydrates is rate limiting in high rate digesters and then only disintegration of decaying microorganisms is accounted for [1].

Each intracellular enzyme mediated biochemical action (acidogenesis, acetogenesis, methanogenesis) (Fig. 1) is generally approximated by a Monod type saturation function as the reaction rate of substrate uptake by organism,  $\rho$  (kg COD substrate m<sup>-3</sup> d<sup>-1</sup>), as described in eqn (2).

$$\rho = k_m \cdot X \cdot \frac{S}{S + K_s} \cdot I \quad (2)$$

Equation (2) contains the maximum substrate uptake rate constant  $k_m$  (kg COD substrate kg COD biomass<sup>-1</sup> d<sup>-1</sup>),  $X$  = biomass concentration (kg COD biomass m<sup>-3</sup>),  $S$  = substrate con-

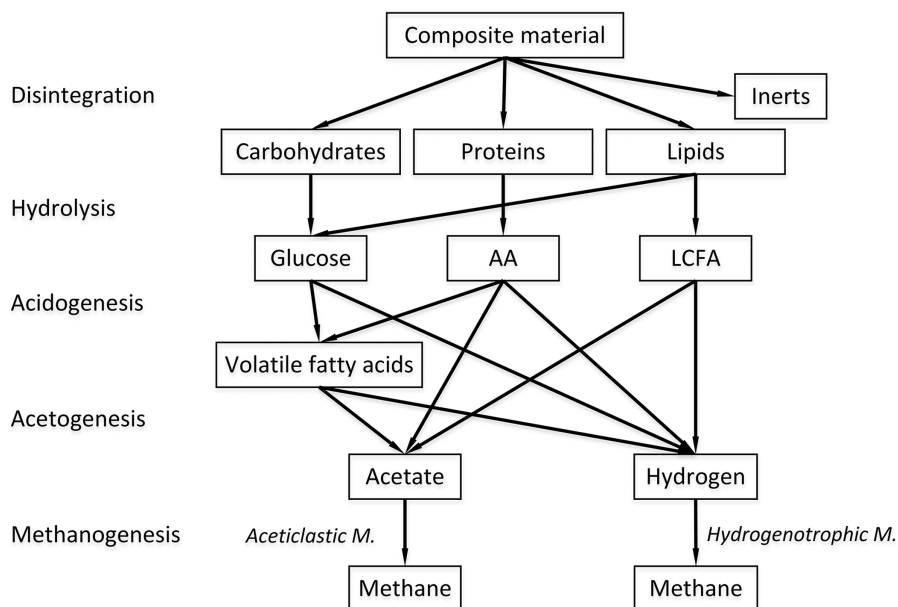


Figure 1: COD flow diagram of the Anaerobic Digestion Model No.1 (Adapted from Batstone *et al.* [1]) showing the biochemical reactions as arrows, all included temperature effects in AMD1-T.

centration ( $\text{kg COD substrate m}^{-3}$ ),  $K_s$  = half saturation constant ( $\text{kg COD substrate m}^{-3}$ ) and  $I$  = inhibition factor. The growth of biomass,  $X$ , is expressed through the yield,  $Y$  ( $\text{kg COD biomass X kg COD substrate}^{-1}$ ) of uptake of substrate, while biomass death is described by  $K_d$  ( $\text{d}^{-1}$ ).

An ADM1-T model [2] with relative temperature effects [3, 4] for the degradation equations implemented is used here.

### 2.1.2 SRT

The conditions with longer SRT than hydraulic retention time (HRT) is implemented in ADM1 as  $\text{SRT} = \text{tres}_x + \text{HRT}$ , recommended with  $\text{tres}_x = 40$  days for high rate, sludge bed reactors. The validation experiment was carried out in a sludge bed reactor, but not at a high rate, so using lower  $\text{tres}_x$  is evaluated. Another method for calculating SRT where SRT is changed proportionally to HRT (instead of having a fixed difference) using  $f_{x_{\text{out}}} = \text{HRT/SRT}$  is suggested by Zaher *et al.* [5] for testing of wash out effects. This approach is also examined here since the HRT tested experimentally is low compared to typical values for such high particulate feeds.

## 2.2 AD sludge bed experiment

### 2.2.1 AD reactor design operation

The dairy manure feed was from the organic milk producer Foss Farm in Skien, Norway. The manure is on average 14% diluted by water used for washing purposes in the barn [6] making it a slurry and the handling of the slurry is described in Bergland *et al.* [2]. To prepare

the manure slurry as feed it was treated in a rotating vacuum drum filter (mesh light opening of 1.4 mm) to remove the coarse solids. The filtrate was used as AD feed (substrate) in this study. The dairy manure AD was performed in a sludge bed reactor as an integral part of a process to generate fertilizers and biogas, as described by Haugen *et al.* [7]. The AD reactor is described in Bergland *et al.* [2]. The process had been operated for 1 year at 35°C before the 470 days operation reported here, allowing the culture to adapt to cow manure filtrate as substrate. The reactor was operated at the mesophilic temperatures 25°C, 30°C and 35°C at both high and low loads during this test. The load was from zero up to a load corresponding to a hydraulic retention time (HRT) of 3.6 days. The reactor was semi-continuously operated by pulse feeding with the feeding pump controlled as a binary (On/Off) device [7].

### 2.2.2 Feed description

The biodegradability and yield of the feed is reported in Bergland *et al.* [2]. The fractions of protein ( $f_{pr}$ ), carbohydrates ( $f_{ch}$ ) and lipids ( $f_{li}$ ) in the biodegradable fraction are unknown and are therefore varied in the simulations to evaluate the effects of this fractionation (Table 1). The biodegradability fraction of dissolved organics ( $COD_S$ ) and biodegradability fraction of particulates ( $COD_P = COD_T - COD_S$ ) are also evaluated by simulations.

### 2.2.3 Monitoring and analysis

A comprehensive online and offline-testing scheme was used to monitor the AD reactor. Biogas production ( $L d^{-1}$ ), gas composition (fractions of  $CO_2$  and  $CH_4$ ), liquid flow and reactor

Table 1: Description of the feed.

Parameter	Content	Formula	Denomination
X_c	composite	0	g COD L <sup>-1</sup>
X_pr	protein	$f_{pr} * \text{biodegradable fraction in particulates} * (COD_T - COD_S)$	g COD L <sup>-1</sup>
X_li	lipid	$f_{li} * \text{biodegradable fraction in particulates} * (COD_T - COD_S)$	g COD L <sup>-1</sup>
X_ch	carbohydrates	$f_{ch} * \text{biodegradable fraction in particulates} * (COD_T - COD_S)$	g COD L <sup>-1</sup>
X_I	solid inert	Inert particulates which remains as solid* ( $COD_T - COD_S$ )	g COD L <sup>-1</sup>
S_I	soluble inert (from solid)	Inert particulates which dissolves in liquid * ( $COD_T - COD_S$ )	g COD L <sup>-1</sup>
S_I	soluble inert (from liquid)	Inert in liquid* ( $COD_S - COD_{VFA}$ )	g COD L <sup>-1</sup>
S_su	sugar	(Biodegradable liquid of feed - $COD_{VFA}$ )* $f_{ch}$ * ( $COD_S - COD_{VFA}$ )	g COD L <sup>-1</sup>
S_aa	amino acids	(Biodegradable liquid of feed - $COD_{VFA}$ )* $f_{pr}$ * ( $COD_S - COD_{VFA}$ )	g COD L <sup>-1</sup>
S_fa	long chain fatty acids	(Biodegradable liquid of feed - $COD_{VFA}$ )* $f_{li}$ * ( $COD_S - COD_{VFA}$ )	g COD L <sup>-1</sup>

temperature were monitored continuously online as described by Haugen *et al.* [7]. Substrate and effluent samples were collected 1–2 times a week. Total chemical oxygen demand ( $COD_T$ ), soluble COD ( $COD_S$ ), total solids (TS), volatile solids (VS), total suspended solids (TSS), volatile suspended solids (VSS), pH, alkalinity,  $NH_4^+-N$  and VFA's (acetate, propionate, butyrate, iso-butyrate, valerate, iso-valerate) were analyzed as described in Bergland *et al.* [8].

### 3 RESULTS

#### 3.1 AD sludge bed reactor data input to the model

The methane production of the pilot AD is presented with the simulated results in Figs 2 and 3 during the given load and temperature step changes (Fig. 4). Measured substrate concentrations are in Table 2.

The simulated  $CO_2$  concentration in the biogas was as measured by setting inflow substrate  $HCO_3^-$  level as given in Table 2. The modelled effluent pH level was forced to match the measured values by finding (by “trial and error”) the appropriate addition of a constant concentration of ions in the inflow substrate.

#### 3.2 Simulation of AD reactor

SRT, feed composition (protein, fat and carbohydrates) and biodegradability in particulates and liquid feed is evaluated and quantified in the following sub-chapters. The biogas generated comes from 60% fat, 20% carbohydrates and 20% protein in the simulations giving the best fit with measured values. Likewise, the best-fit simulations shows that 85% of methane comes from liquid feed (CODs) and 15% from solid feed. These best-fit simulations are presented in Figs 2, 3 and 5.

##### 3.2.1 Sludge retention time

The process simulation is observed to be highly dependent on SRT, a parameter that is unknown and uncontrolled in most sludge bed reactors such as tested here.

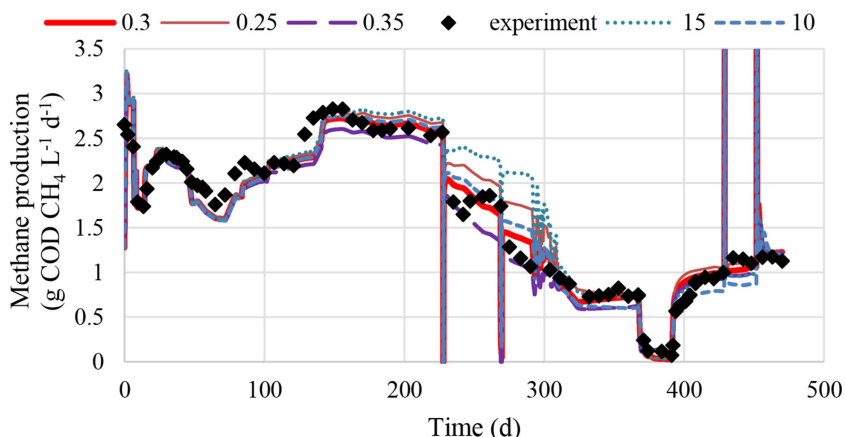


Figure 2: Methane production rate, measured and simulated, with two SRT models and the following SRT model parameters:  $f_{xout}$  0.25, 0.3 and 0.35 together with  $tres_x = 10$  and 15.

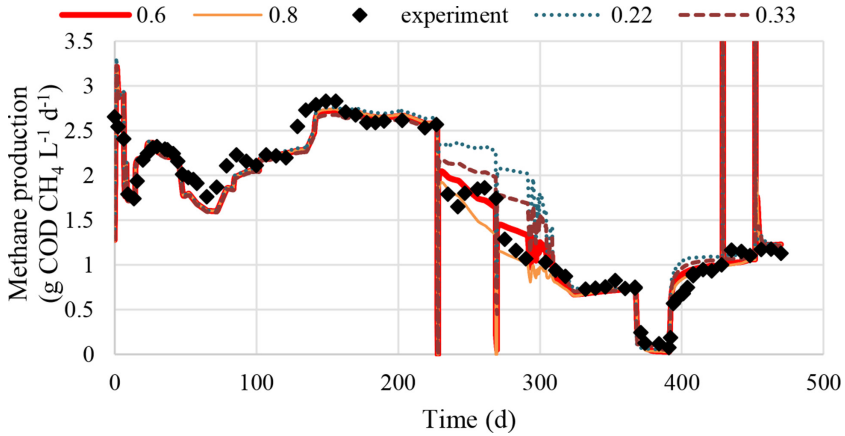


Figure 3: Methane production rate, measured and simulated, with fat content 20%, 33%, 60% and 80%.

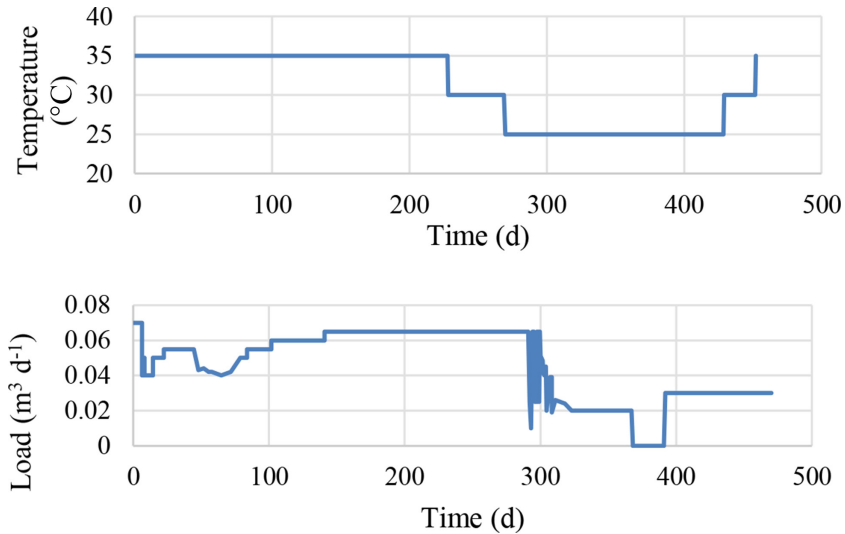


Figure 4: Temperature (°C) and load (m<sup>3</sup> d<sup>-1</sup>) during the experiment.

Table 2: Substrate inflow content to the AD reactor, used as influent values in the simulations.

Parameter	Content	Concentration	Denomination
COD <sub>T</sub>	total COD	50.9 ± 3	g COD L <sup>-1</sup>
COD <sub>S</sub>	soluble COD	14.7 ± 1	g COD L <sup>-1</sup>
S <sub>ac</sub>	acetic acid	3.1 ± 0.6	g COD L <sup>-1</sup>
S <sub>pro</sub>	propionic acid	0.75 ± 0.31	g COD L <sup>-1</sup>
S <sub>bu</sub>	butyric acid	0.18 ± 0.10	g COD L <sup>-1</sup>
S <sub>IC</sub>	HCO <sub>3</sub> <sup>-</sup>	0.058 – 0.075	M
S <sub>IN</sub>	NH <sub>4</sub> + NH <sub>3</sub>	0.062 ± 0.006	M

In order to evaluate the effect of SRT, feed composition and biodegradability of particulates and liquid, the values that gave the best fit for all the intermediate products and methane production rate is used here to evaluate the effect of SRT.

SRT is calculated using  $\text{tres}_x = 15$  in the previous simulation [2] of this process at lower loads (days 330–470).  $\text{tres}_x = 15$  is also tested in this work but did not give a good fit after the temperature reductions at high loads as it predicts higher gas production than observed.  $\text{tres}_x = 10$  was therefore also examined. A low  $\text{tres}_x$ , implying lower SRT than that proposed for UASB by Batstone *et al.* [1] ( $\text{tres}_x = 40$ ) seem reasonable for the present case since HRT was higher than typical for sludge bed AD. SRT is also calculated using  $f_{xout}$  and the best correlations were obtained in the range  $f_{xout} = 0.25 - 0.35$ . These  $f_{xout}$  give results comparable to  $\text{tres}_x$  of 10–15 (Fig. 2).

Using  $f_{xout}$  instead of  $\text{tres}_x$  improved the fit at high load with temperature reductions (e.g. days 225–300 in Fig. 2) with SRT calculated from  $f_{xout} = 0.3$  being closest to the experimental values for both intermediate products and methane production. The  $\text{SRT} = \text{HRT}/f_{xout}$  model evidently gives a better fit than  $\text{SRT} = \text{HRT} + \text{tres}_x$  during the transient conditions. This suggests that there is a stronger correlation between SRT and HRT in sludge bed processes than predicted by the  $\text{SRT} = \text{HRT} + \text{tres}_x$  model.

The active reactor biomass concentrations predicted using SRT calculated from  $f_{xout} = 0.3$  seems quite realistic given the load applied. It is below  $10 \text{ g COD L}^{-1}$  which is  $\frac{1}{4}$  of the upper limit of  $40 \text{ g COD L}^{-1}$  reactor for sludge bed AD operated at  $>4$  times higher loads [9].

Simulated effects of SRT on methane production, acetate, LCFA and CODs concentration in the effluent may also give clues on which reactions may be the overall rate limiting steps. The observation that SRT mainly influence acetate, the reactant for most of the methane production, and LCFA, suggests that methanogenesis and LCFA degradation are the most likely overall rate limiting steps in the process investigated. These two reactions are at least especially sensitive to load transitions and SRT.

### 3.2.2 Feed composition effect

A series of four composition ratios was tested:

- 1/3 of fat, carbohydrates and protein as in the original model for wastewater [1].
- 22% fat, 51% carbohydrates and 27% protein as used in a previous simulation [2] of the same process (days 330–470).
- 60% fat, 20% carbohydrates and 20% protein.
- 80% fat, 10% carbohydrates and 10% protein.

The high fat concentration cases give the best fit with the measured methane production rates, most clearly seen during the high load rate and temperature transient phases (from 230 to 300 d in Fig. 3). High fat content in the feed also gave the best fit for the load increase on day 390. The cases with the lowest fat content never gave significantly better fit than the high fat cases. No support is found in the literature of such high fat content in dairy manure, but hardly any relevant information is found so high fat content is assumed reasonable. 60% fat gave the best overall fit and is used in the simulations to test other parameters.

LCFA has a lower degradation rate ( $k_m = 6$  in eqn (2)) than amino acids ( $k_m = 50$ ) and monosaccharide ( $k_m = 30$ ) that can explain the better fit at high load and low temperature.

Table 3: Relative solubility. Calculated from [10–12].

Temperature	Solubility relative to 35°C		
	Average of C13–C18 LCFA (not included C19–C21)	Average of 11 amino acids	sucrose
35°C	100%	100%	100%
30°C	93%	88%	94%
25°C	86%	77%	88%

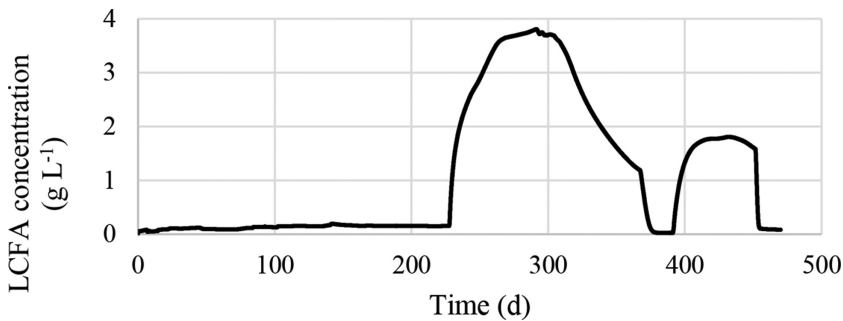


Figure 5: Simulated reactor effluent LCFA concentration during the simulation with best fit.

The relative change in solubility for LCFA, amino acids and sucrose is rather similar (Table 3). The lower degradation rate of LCFA at low temperature, therefore, cannot be explained by the difference in solubility as temperature is reduced.

The tested feed composition using 60% fat is predicting the key intermediate, acetate, best. Propionate is underestimated as in Bergland *et al.* [2]. Simulated overall soluble and particulate organic carbon removal and pH are close to measured values.

It is normally either the disintegration, hydrolysis, degradation of propionic acid or the methanogenesis that is the limiting AD reaction [1]. The relatively small fraction of particles degraded in our experiment, with 85% of methane from dissolved organics in the feed, indicates disintegration and hydrolysis as rate limiting in this case. However, the simulation with the overall best fit to experimental data shows elevated transient LCFA (Fig. 5). This suggests LCFA degradation as a rate limiting process step of the process investigated here. This is also supported by the observation that SRT, feed composition and biodegradability of particulates and dissolved feed components all influence the LCFA concentration in the effluent more than the concentrations of the other dissolved organics.

#### 4 CONCLUSION

The ADM1-T, where temperature effects on kinetic coefficients for all the biochemical processes are included, yields good fit of simulated and measured methane production rate in a long term experiment where load and temperature were varied under mesophilic conditions. Simulated overall soluble and particulate organic carbon removal, methane and CO<sub>2</sub> production, pH and acetate are close to measured values while propionate is underestimated.



The main deviations between measured and modelled values, observed at simultaneously high load and low temperature, were sensitive to both SRT and feed composition. The fit is mainly sensitive to the composition of the feed in terms of relative amounts of lipids, proteins and carbohydrates especially at simultaneously high load and low temperature.

The model predicts accumulation of long chained fatty acids (LCFA) during such conditions, suggesting that the degradation of LCFA is the rate-limiting step at lower temperatures. Reduction in LCFA solubility at reduced temperature does not explain this effect. The model predicts that the sludge bed AD efficiency of substrates with little or no LCFA is independent of temperature between 25°C and 35°C while LCFA degradation is favoured at higher temperatures.

#### ACKNOWLEDGEMENTS

The project was supported by the Norwegian Agricultural Agency, Innovation Norway, The Research Council of Norway, Ministry of Education and Research and Telemark University College. The authors wish to thank farmer Knut Vasdal for the good cooperation in carrying out the experiment and Associate Professor Finn Haugen for the automatic process monitoring and control.

#### REFERENCES

- [1] Batstone, D.J., Keller, J., Angelidaki, I., Kalyuzhnyi, S.V., Pavlostathis, S.G., Rozzi, A., Sanders, W.T.M., Siegrist, H. & Vavilin, V., The IWA anaerobic digestion model no. 1 (adm1). *Water Science and Technology*, **45**(10), pp. 65–73, 2002.
- [2] Bergland, W.H., Dinamarca, C. & Bakke, R., Temperature effects in anaerobic digestion modeling. In *Proceedings of SIMS 2015 the 56th, International Conference of Scandinavian Simulation Society*, pp. 7–9, 2015.  
<http://dx.doi.org/10.3384/ecp15119261>
- [3] Donoso-Bravo, A., Retamal, C., Carballa, M., Ruiz-Filippi, G. & Chamy, R., Influence of temperature on the hydrolysis, acidogenesis and methanogenesis in mesophilic anaerobic digestion: parameter identification and modeling application. *Water Science and Technology*, **60**(1), pp. 9–17, 2009.  
<http://dx.doi.org/10.2166/wst.2009.316>
- [4] Rebac, S., Ruskova, J., Gerbens, S., Vanlier, J., Stams, A. & Lettinga, G., High-rate anaerobic treatment of waste-water under psychrophilic conditions. *Journal of Fermentation and Bioengineering*, **80**(5), pp. 499–506, 1995.  
[http://dx.doi.org/10.1016/0922-338X\(96\)80926-3](http://dx.doi.org/10.1016/0922-338X(96)80926-3)
- [5] Zaher, U., Rodriguez, J., Franco, A. & Vanrolleghem, P.A., Application of the IWA ADM1 model to simulate anaerobic digester dynamics using a concise set of practical measurements. *IWA Conference on Environmental Biotechnology*, Kuala Lumpur, pp. 9–19, 2003.
- [6] Bergland, W.H., Dinamarca, C. & Bakke, R., Efficient biogas production from the liquid fraction of dairy manure. *Renewable Energy & Power Quality Journal (RE&PQJ)*, **12**, 2014.
- [7] Haugen, F., Bakke, R. & Lie, B., Adapting dynamic mathematical models to a pilot anaerobic digestion reactor. *Modeling, Identification and Control*, **34**(2), pp. 35–54, 2013.  
<http://dx.doi.org/10.4173/mic.2013.2.1>
- [8] Bergland, W.H., Dinamarca, C., Toradzadegan, M., Nordgård, A., Bakke, I. & Bakke, R., High rate manure supernatant digestion. *Water Research*, **76**, pp. 1–9, 2015.  
<http://dx.doi.org/10.1016/j.watres.2015.02.051>

- [9] Kleerebezem, R. & van Loosdrecht, M., Critical analysis of some concepts proposed in ADM1. *Water Science and Technology*, **54**(4), pp. 51–57, 2006.  
<http://dx.doi.org/10.2166/wst.2006.525>
- [10] Dunn, M.S., Ross, F.J. & Read, L.S., The solubility of the amino acids in water. *Journal of Biological Chemistry*, **103**(2), pp. 579–595, 1933.
- [11] Bober, K. & Garus, M., RP-HPTLC Application in the investigation of solubility in water of long-chain fatty acids. *Journal of Liquid Chromatography & Related Technologies*, **29**(19), pp. 2787–2794, 2006.  
<http://dx.doi.org/10.1080/10826070601001476>
- [12] Alves, L.A., Almeida e Silva, J.B. & Giuliatti, M., Solubility of d-glucose in water and ethanol/water mixtures. *Journal of Chemical and Engineering Data*, **52**(6), pp. 2166–2170, 2007.  
<http://dx.doi.org/10.1021/jc700177n>